

Elite Dry Bath Incubator

The Elite dry bath incubator includes single and dual block modes, along with a competitive range of interchangeable blocks. It is designed for a variety of applications, including restriction digests, denaturing DNA, BUN, melting agar, coagulation studies, hybridization and Hot Start thermo-cycled reaction. Due to its advanced design, Elite dry bath is recognized as the finest, fastest temperature performance and smallest foot print dry bath incubator, in addition to being a mini water bath. Its temperature setting can be set in 0.1°C increments from 5°C above ambient to 150°C along with a timer shown on the LCD screen simultaneously. Optional Function Control software controls dry bath incubator and real time data recording through a PC for your specified requirement.

Features

- >Microprocessor control with digital performance for precise, accurate control
- >Wide temperature control range & great temperature controlled performance
- >Excellent temperature increasing rate
- >LCD screen shows timer and temperature simultaneously
- >User temperature calibration
- >Used as a water bath
- >Molded aluminum alloy chamber
- >Function Control software available



CE

Cat. No. :EL-01



CE

Cat. No. :EL-02



Specification	EL-01 (One Block)	EL-02 (Dual Block)
Display	LCD Display	
Heating Power	125W	200W
Unit Dimension (W x L x H)	152 x 150 x 135mm	152 x 230 x 135mm
Controller	Digital microprocessor controller	
Heating Chamber	Molded aluminum alloy chamber	
Temperature Control Range	5°C above ambient to 150°C	
Temperature Increment	0.1°C	
Temperature Uniformity at 37°C	± 0.2°C	
Temperature Accuracy at 37°C	± 0.2°C	
Temperature Calibration	Yes	
Timer	Up to 99(hr): 59(min), continuous	
Safety Device	Leakage proof for heating chamber Over temperature protection SSR failure detection	
Operating Temperature	Ambient to 40°C	
Special Feature	Used as water bath incubator	
Block Material	Aluminum alloy	
Block Type	Standard and customized type are available	
Data Log	RS 232	
Rated Voltage	110V or 220V	
Weight	approx. 2.1kg	approx. 2.8kg



■ Water bath

Ordering Information

EL-01-110/220	Elite Dry Bath Incubator (single block unit); without block
EL-02-110/220	Elite Dry Bath Incubator (dual block unit); without block
MD-RS232	RS 232 cable
MD-DLSW	Data Logging software package
MD-PCSW	Function Control software package
MD-DLSW-R	Data Logging software package, including a RS 232 cable
MD-PCSW-R	Function Control software package, including a RS 232 cable


Cat. No. :EL-01



- Temp. Set Value: 100°C
- Initial Temp. Value: 24 °C

Block Mode: MD-B0 .2

Process Time: approx. 23mins

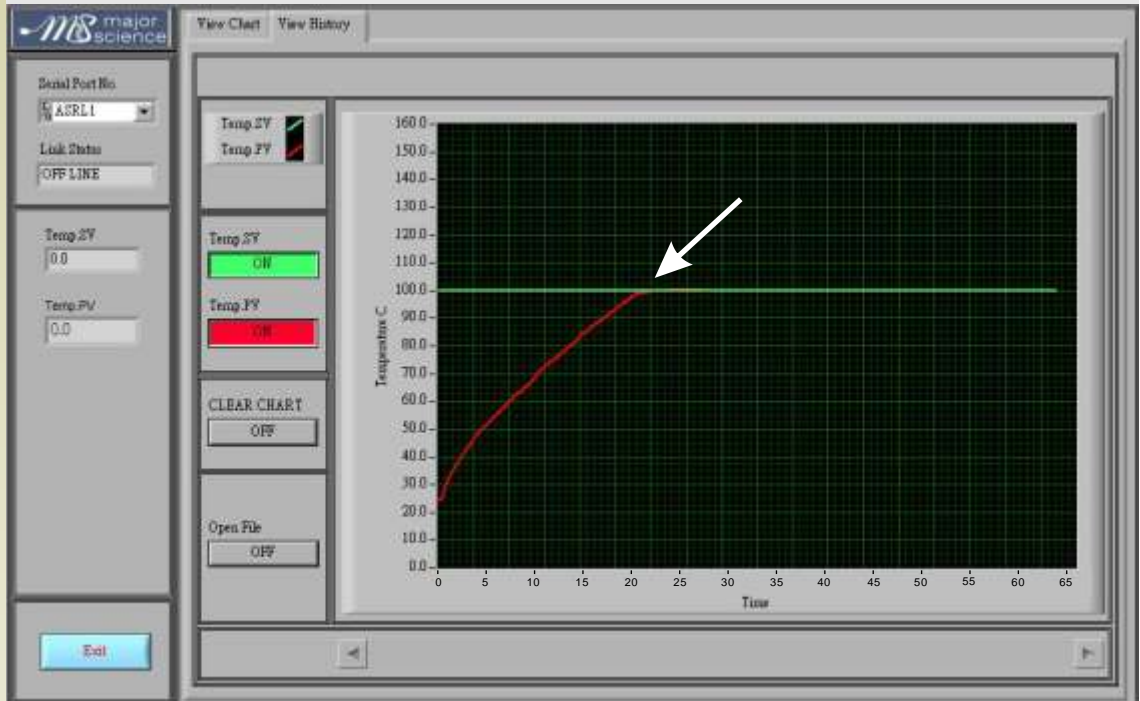


Cat. No. :EL-02



- Temp. Set Value: 100°C
- Initial Temp. Value: 27°C

Block Mode: MD-B0 .2

Process Time: approx. 24mins

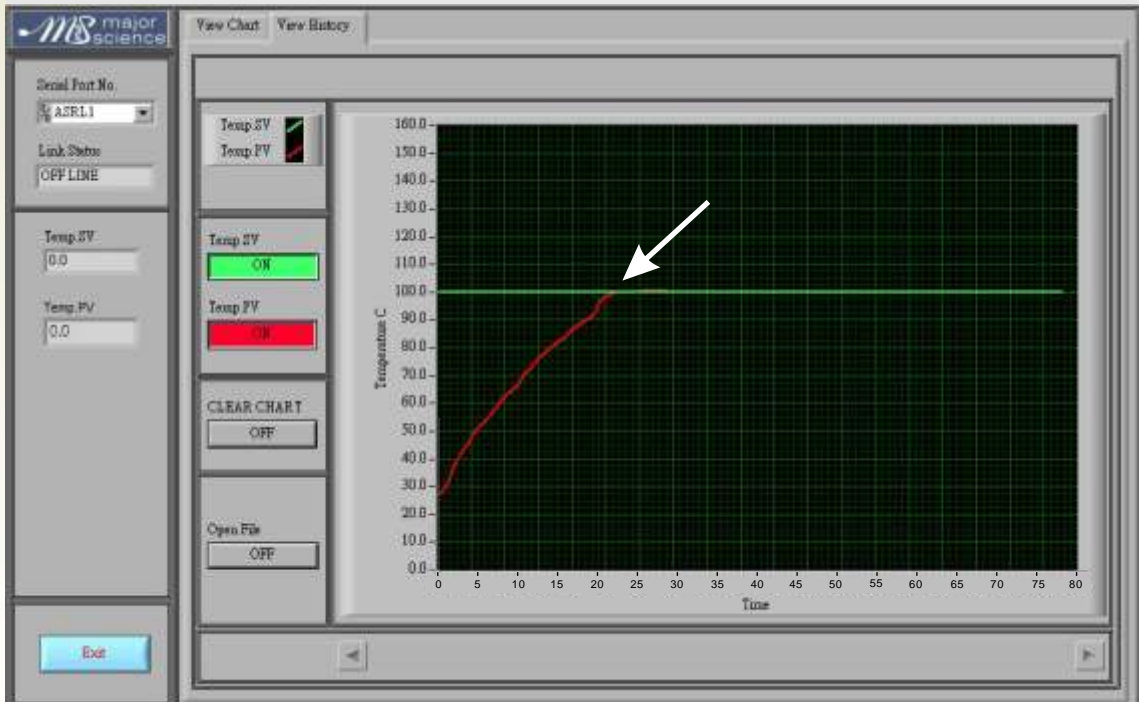

Dry Bath Blocks


Dry Bath Blocks are designed for Elite Dry Bath Incubator and Genius Dry Bath Incubator. The precision machined aluminum alloy blocks, which are suitable for microplate and different test tubes, range from 0.2ml tube to 50ml centrifuge tube, deliver efficient heat transfer. In addition to the standard blocks, customized blocks are also available for specified user requirement.

Specification

Block Material	Aluminum alloy
Dimension (W x L x H)	79 x 104 x 50mm
Block Lifter Well	Yes
Thermometer Well	Yes (except microplate blocks)


MD-MP01-S

For Microplate; Titerplate (Plain Block for Single Block unit only)

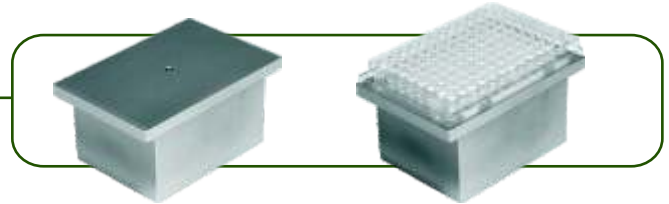


MD-MP01-D

For Microplate; Titerplate (Dual Block unit only)

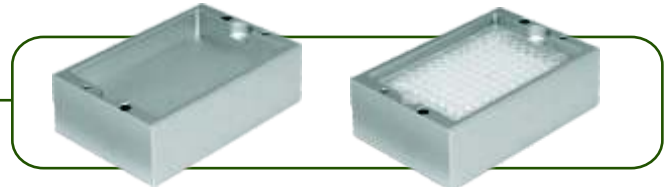


MD-MP02-S

For 96 wells Deep Microplate or PCR plate (for Single Block unit only)

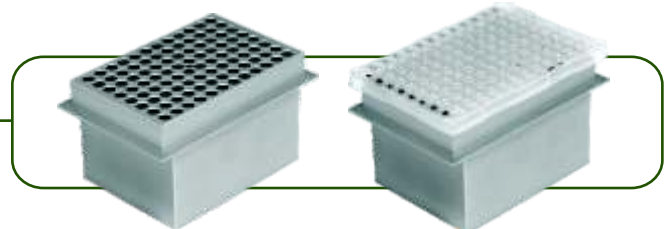


MD-MP02-D

For 96 wells Deep Microplate or PCR plate (for Dual Block unit only)

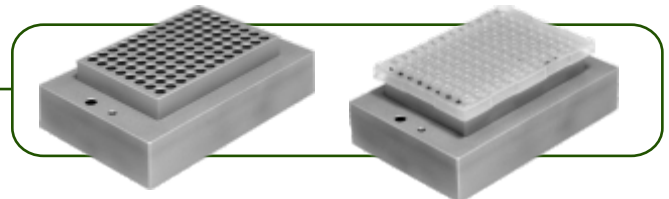


MD-B0.2

For 0.2ml tube, 64 wells (or 0.2ml PCR Strip tube for 8 wells x 8)

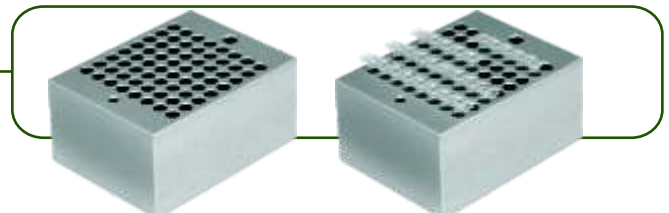


MD-B0.5

For 0.5ml tube, 20 wells

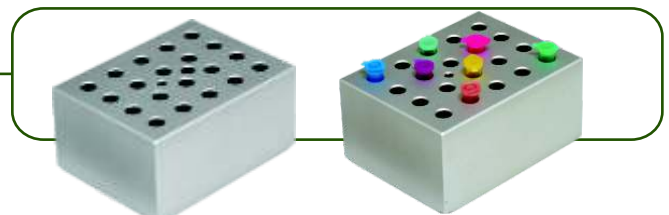


MD-B1.5

For 1.5ml tube, 20 wells

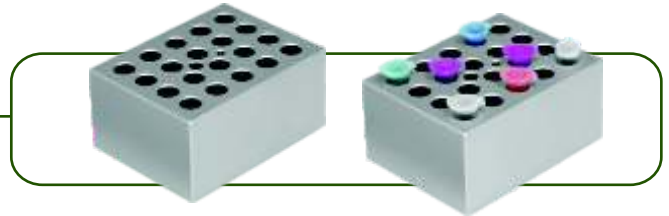


MD-B0.5+1.5

Combination: for 0.5ml tube, 12 wells; and for 1.5ml tube, 12 wells (on the same side)

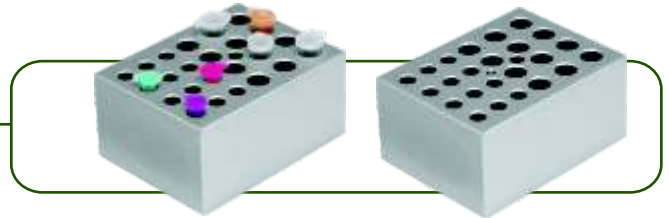


MD-B0.5/1.5

One Side for 1.5 or 2.0ml tube, 20 wells and another side for 0.5 ml tube, 20 wells (on the opposite side)

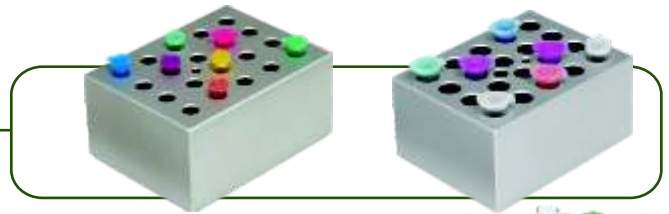

MD-B13

Well size 13mm, 20 wells

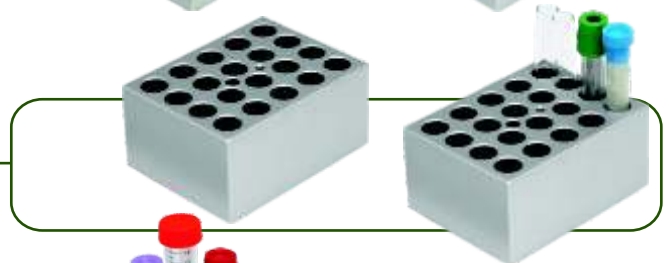

MD-B17

For 15ml centrifuge tube, 12 wells



MD-B20

Well size 20mm, 12 wells



MD-B25

Well size 25mm, 6 wells



MD-B29

For 50ml centrifuge tube, 4 wells

